



META MAKİNE

HARMANLAMA MAKİNESİ MULTİSEP II

9 km/h





Verimli
Hasadın
SIRRI

META MULTİSEP 2 Harmanlama Makinesi ile kuru fasulye, nohut, bezelye, barbunya gibi baklagil ürünleri harmanlanabilmektedir. Ar-Ge faaliyetleri sonucu ortaya çıkan makinemiz ürünlerinizi en hassas şekilde işlemekte olup klasik harmanlama makinelerine göre oldukça verimli bir harmanlama işlemi gerçekleşmektedir.

Dried beans with META MULTİSEP 2 Blending Machine, Legume products such as chickpeas, peas and kidney beans can be blended. Our machine, which emerged as a result of R&D activities, prepares your products with the most precision. It works in a similar way and compared to classical blending machines. A very efficient blending process takes place.

- 3 kata kadar çalışma hızı daha yüksek
- Kırma ve çatlatma oranı daha az
- Nemden etkilenme daha az
- 2.5 ton depo kapasiteli

- Up to 3 times faster operating speed
- Less breaking and cracking rate
- Less exposure to moisture
- 2.5 tons storage capacity

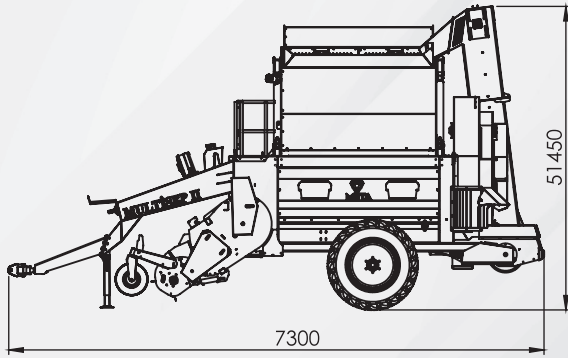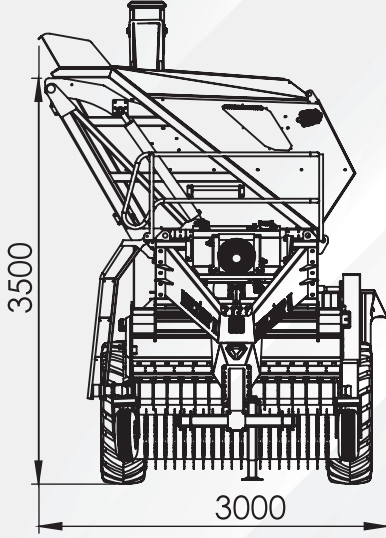

TEKNİK ÖZELLİKLER

Model
Traktör Gücü

Toplayıcı Ünitesi/Pick Up Unit
İş genişliği
Toplayıcı Parmak Tipi

Harmanlama ve Ayırıştırma Sistemi
Harmanlama Silindir Çapı
Harmanlama Pimi
Harmanlama Silindir Uzunluğu
Harmanlama kontrobatör delik çapı

Temizleme Sistemi
Vibrasyon elek delik çapı
Ayırıştırma elek çapı
Fan çapı

Depolama ve Elevatör Sistemi
Elevatör kovası ve miktarı
Depo kapasitesi

Ölçüler
Boşaltma yüksekliği
Taşıma yüksekliği
Tekerlek ölçüsü
Ağırlık

Opsiyonel ekipman
-harmanlama kontrobatörü
-sap parçalayıcı
-toplayıcı hız ayar valfi
-yan çeki oku
-elekler
-büyük tekerlek(24")

Hidrolik fren

Pnömatik fren

TECHNICAL SPECIFICATIONS

Model
Engine power Required

Working With
Type of pick up fingers

Treshing and Separation System
Treshing cylinder diameter
Treshing Pins
Treshing cylinder lenght
Treshing concave hole diameter

Cleaning System
Vibrating sieve hole diameter
Separating sieve hole diameter
Turbine diameter

Storage and Elevator System
Elevator bucket and quantity
Bunker capacity

Diamention
Unloading height
Transport height
whells
Weigt

optional equipment
-Treshing concave
-straw chopper
-Pick up speed control valve
-side pull arrow
-sieves
-big whell(24")

-hydraulik brake

-pnömatik fren

MULTİSEP II
min 100 HP

1780 mm
steel spring/ op. rubber spring

490 mm
33-100°
3000 mm
22 mm

4,5 mm
12 mm
700 mm

39 - plastics
4250 Lt

3370 mm
3700 mm
16.0/70-20
4100 kg



META
MAKİNE

META İnovasyon Makine Tarım San. ve Tic. Ltd. Şti.

+90 543 402 53 39 • +90 332 225 48 25

bilgi@metamakine.com

www.metamakine.com

Fevzi Çakmak Mh. Şehit Hamdi Karagöz Cd.
No: 6 Karatay/KONYA